

DESCRIPTION

Very easy to set up thanks to its wheeled hooks.

Aluminium section roof ladder.

Integrated hooks fitted with two wheels for easy installation on the ridge.

Absorbs any deformation of the roof thanks to its flexibility.

Simple connection system to add elements of 3m or 1.30m..



5 year warranty.

TECHNICAL PART

- Hook resistant to 265 kg in pulling
- Grooved bars, 29 x 29 mm

ADVANTAGES

No need for a roof hook to attach it to the coverage. Hyper fast to set up.

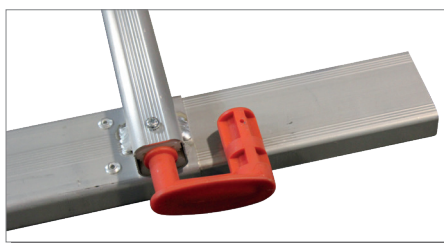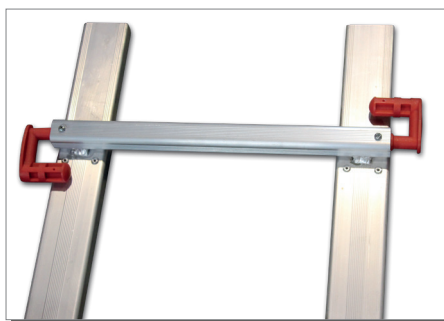

Code	Reference	Length (mm)	Width (mm)	Weight (kg)
A0004911	E31CHTOIT230	2,30 (8')	0,40 (1')	5,50 (12,10 lb)
A0004913	E31CHTOITRA300	3,00 (10')	0,40 (1')	6,00 (13,23 lb)
A0004912	E31CHTOITRA130	1,30 (4')	0,40 (1')	2,80 (6.17 lb)